

DSOF-N Series

Outdoor Floor Stand Digital Signage, In Stock



Shenzhen Senlar Vision Technology CO., Ltd.


www.senlar.com

Features:


- Ready stock, fast delivery within 7-10 days
- High brightness options ranging from 1000-5000 nits (standard 3000 nits)
- 26mm bezel, 85mm thickness - fashionable frame with ultra-thin design
- High temperature resistant, utilizing industrial LCD glass, screen working temperature up to 50°C
- Automatic brightness control, energy saving
- Electronic part: Electricity leaking protection, lightning protection.
- IPS panel, 178 wide viewing angle
- IP66 protection level

Dimension:


32inch

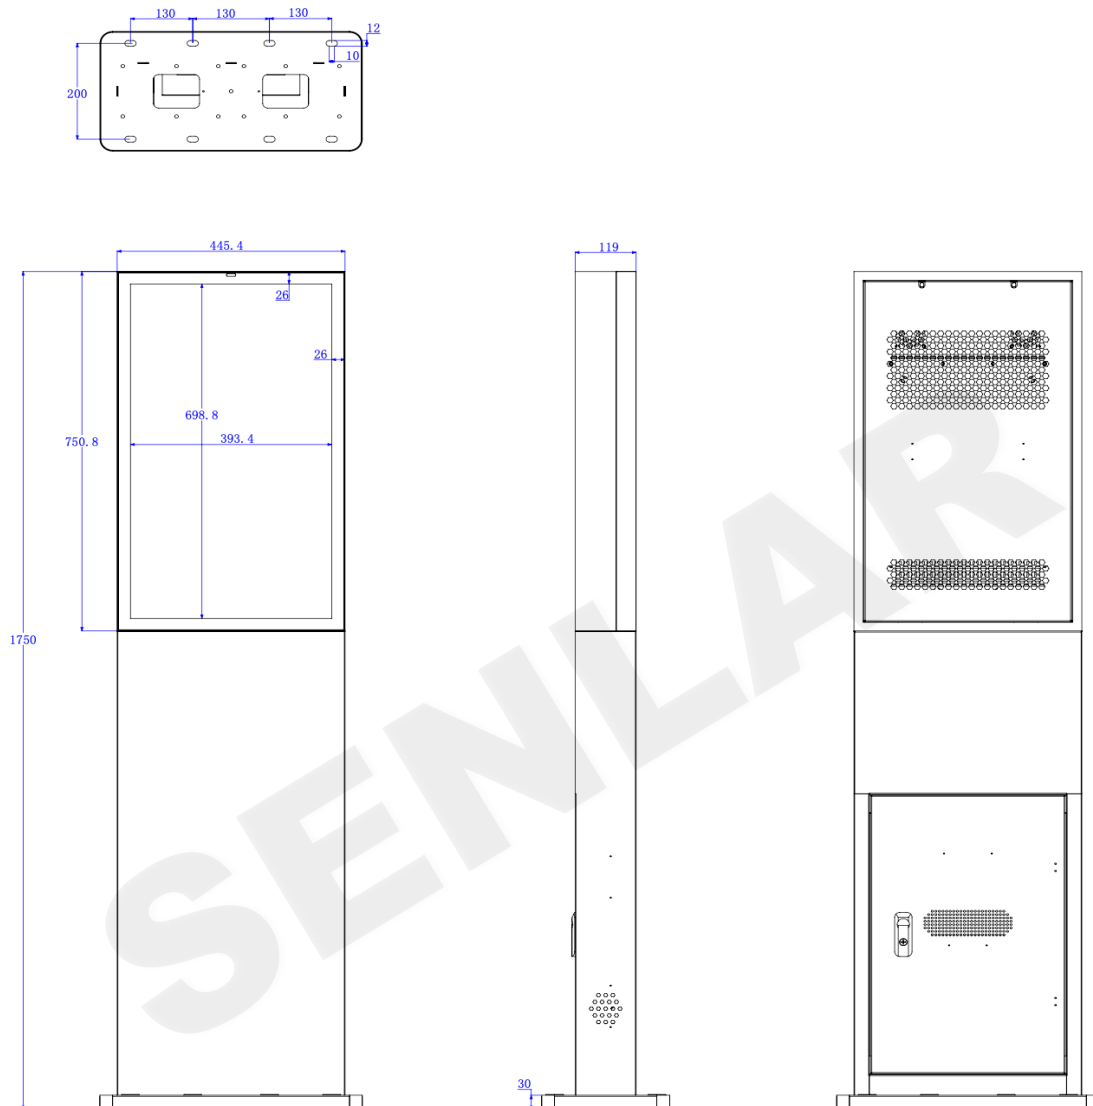


43inch

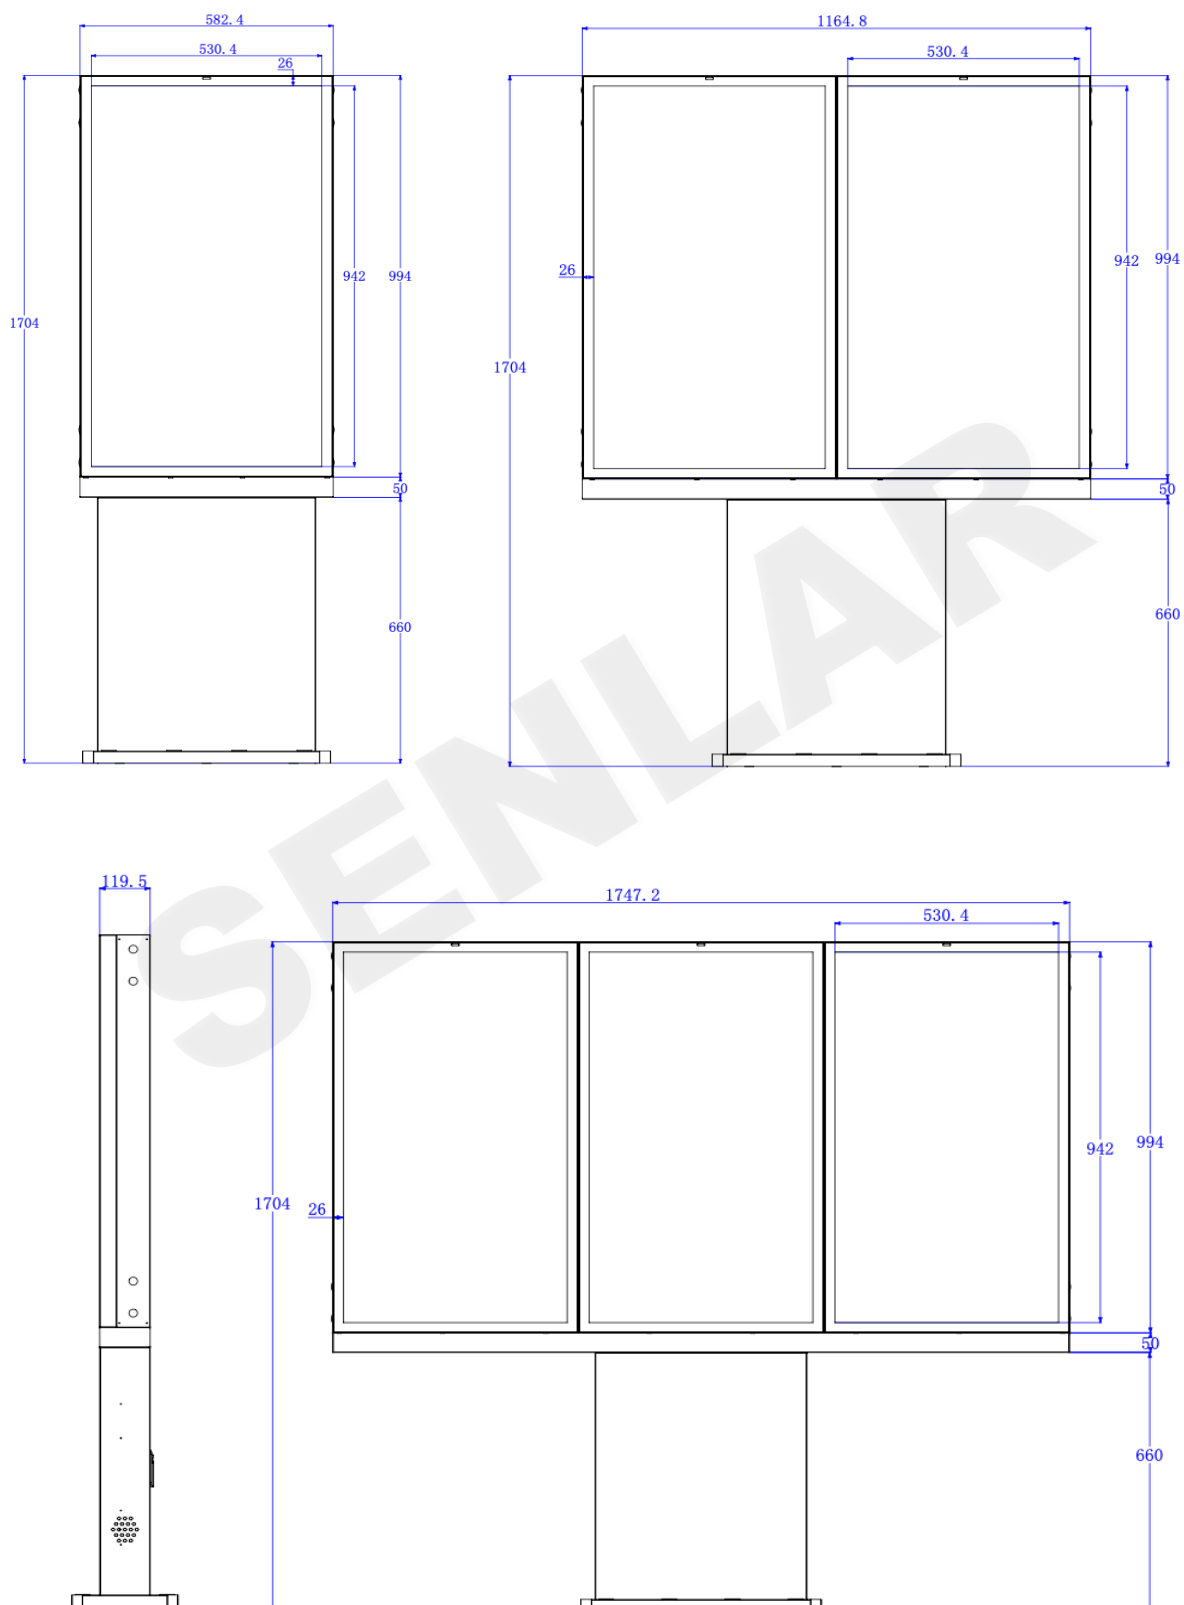


49inch

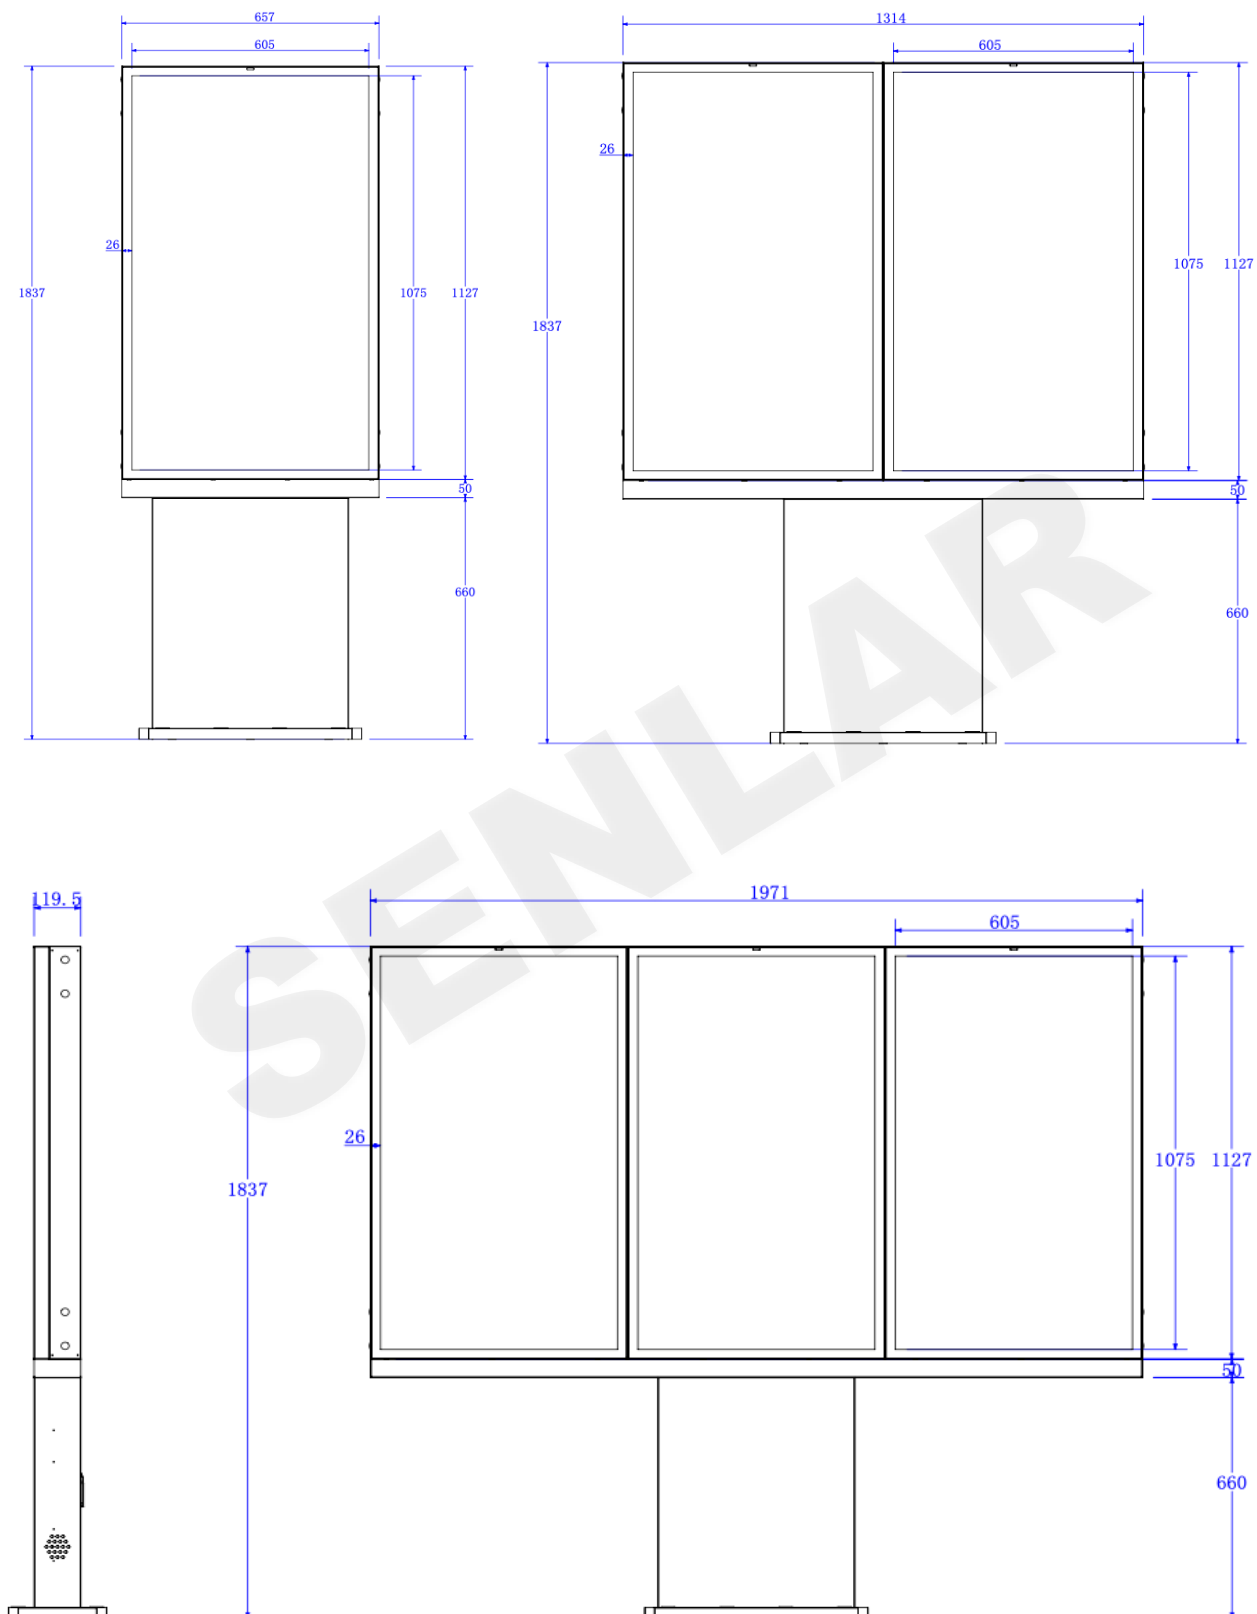


55inch

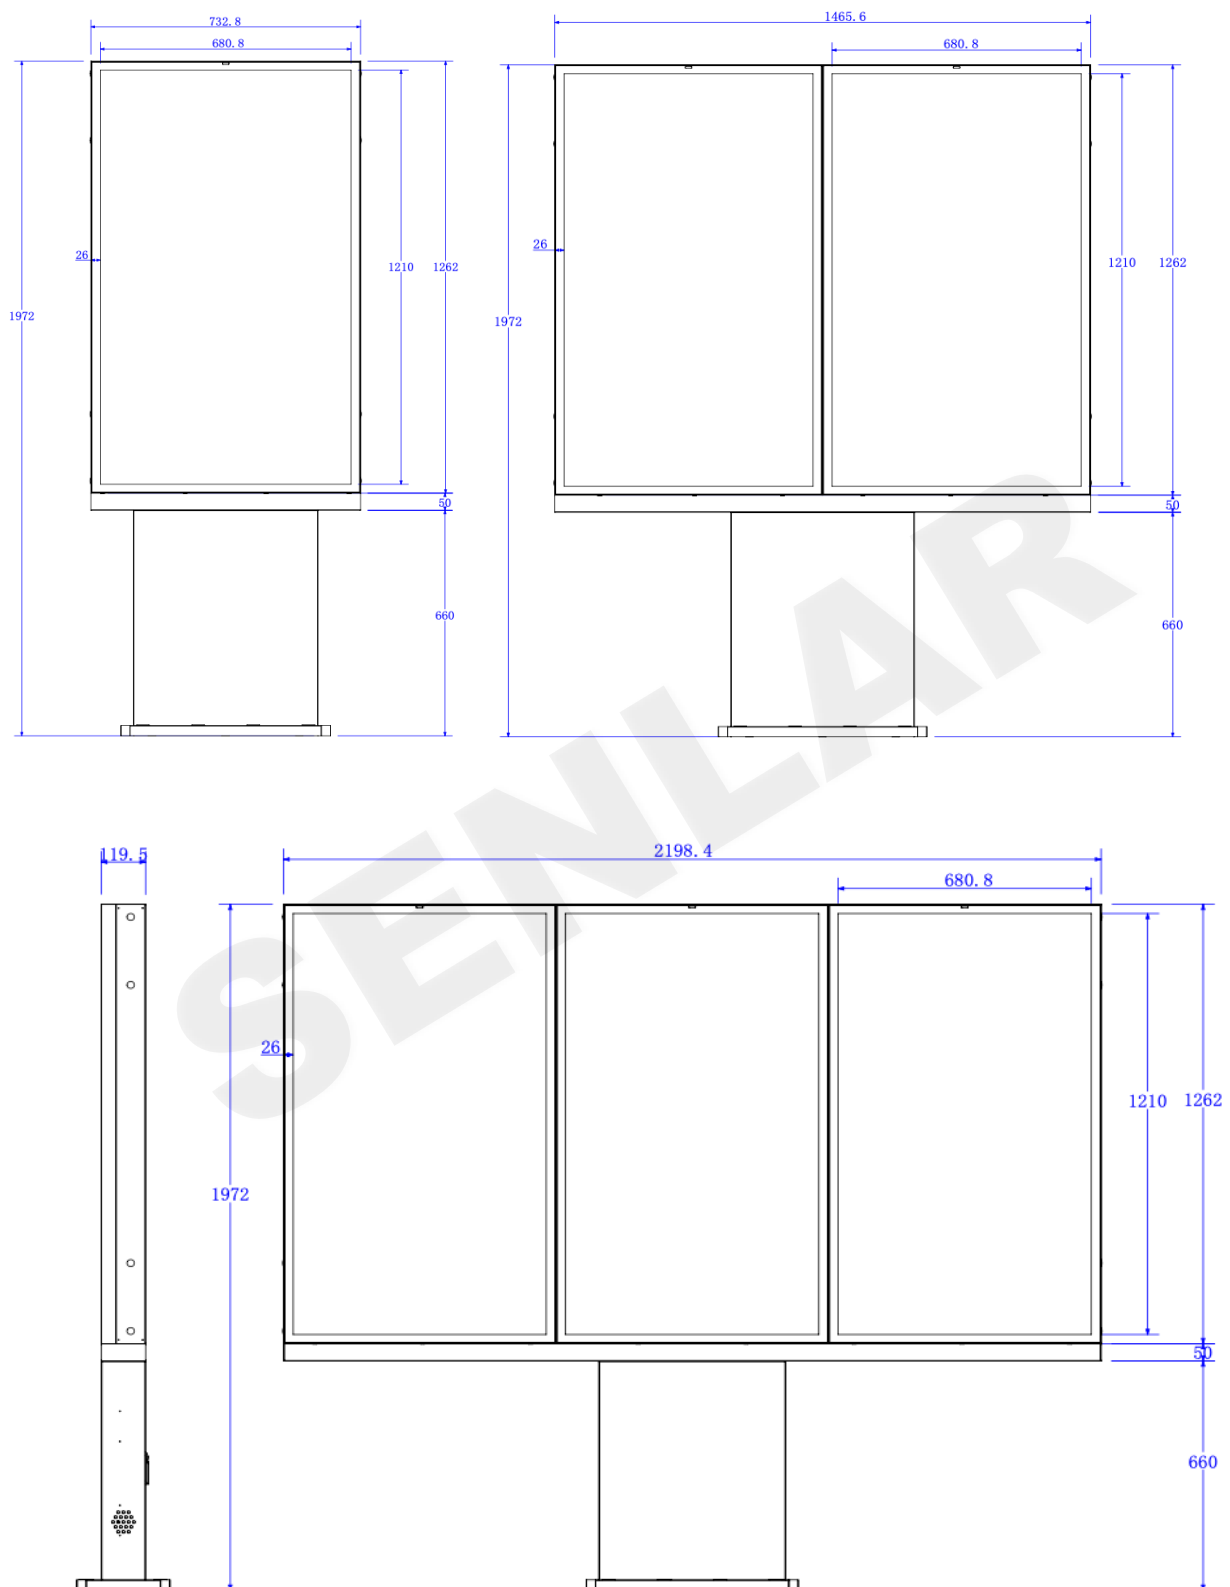

65inch

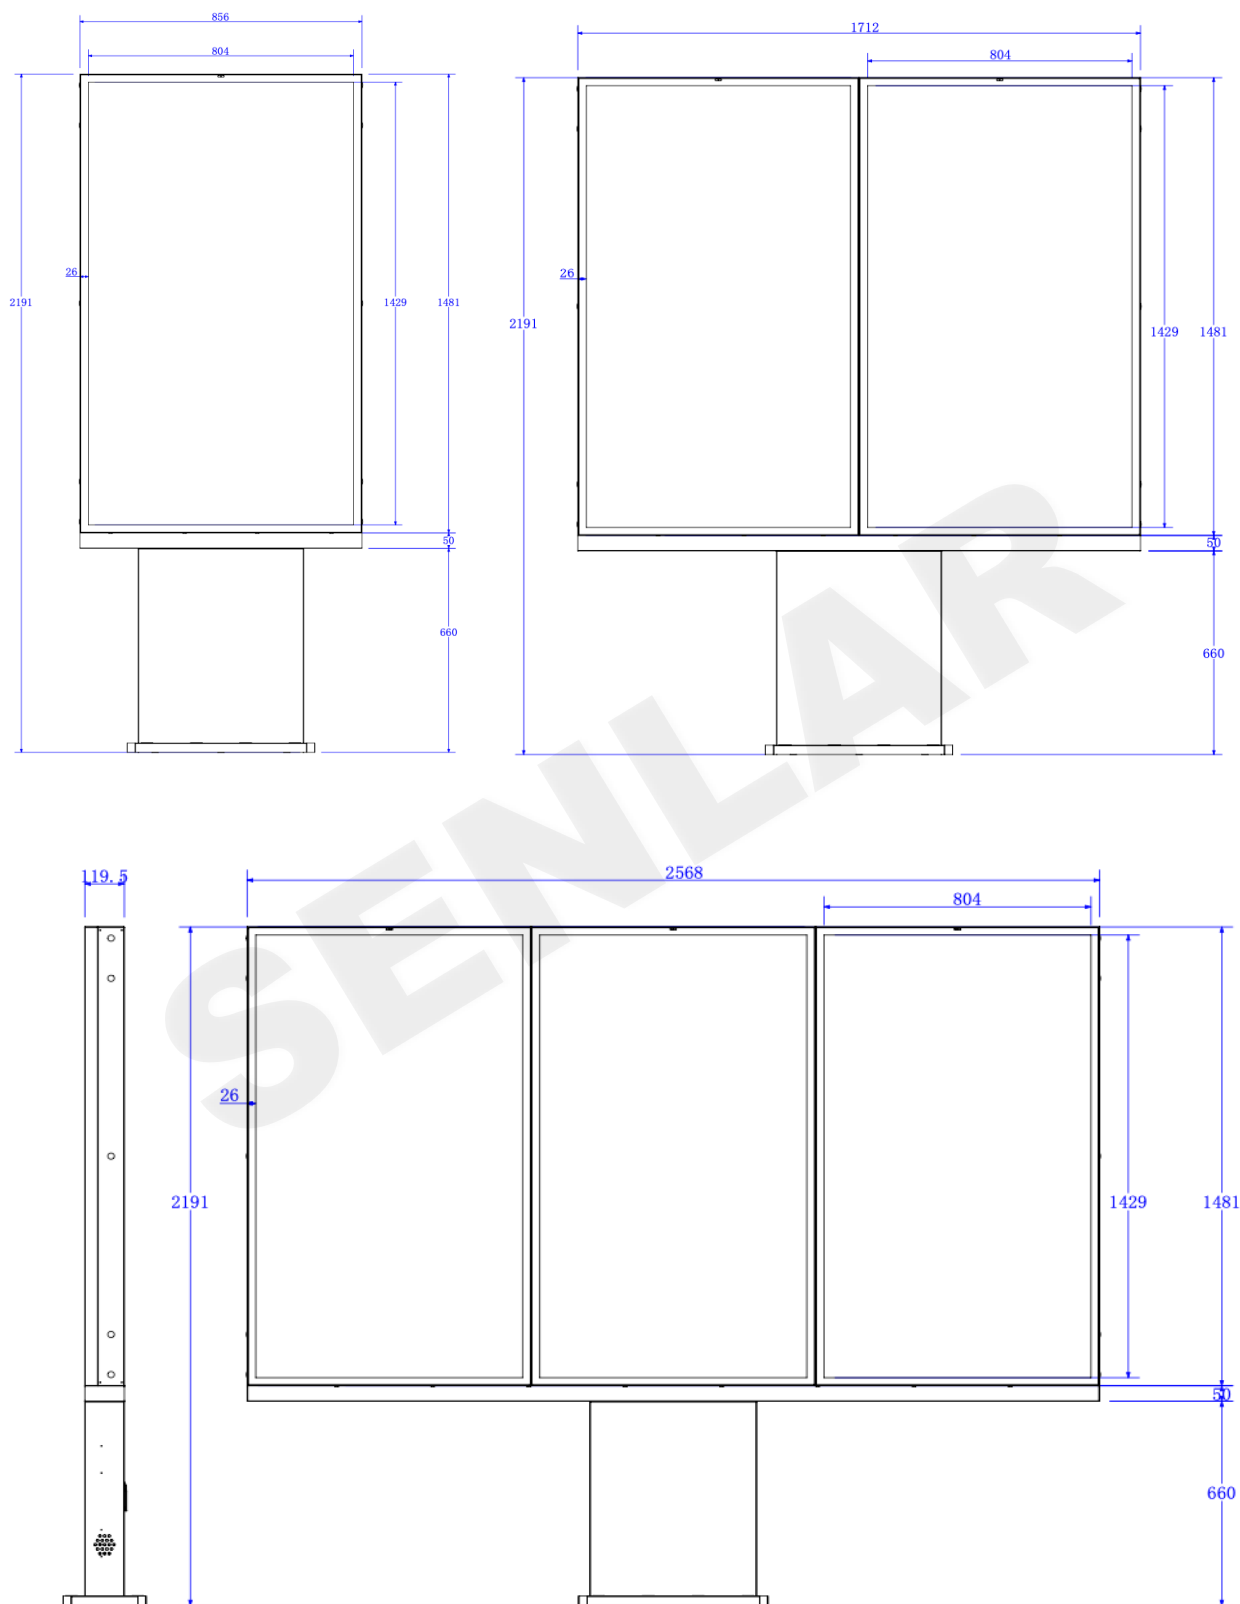

75inch

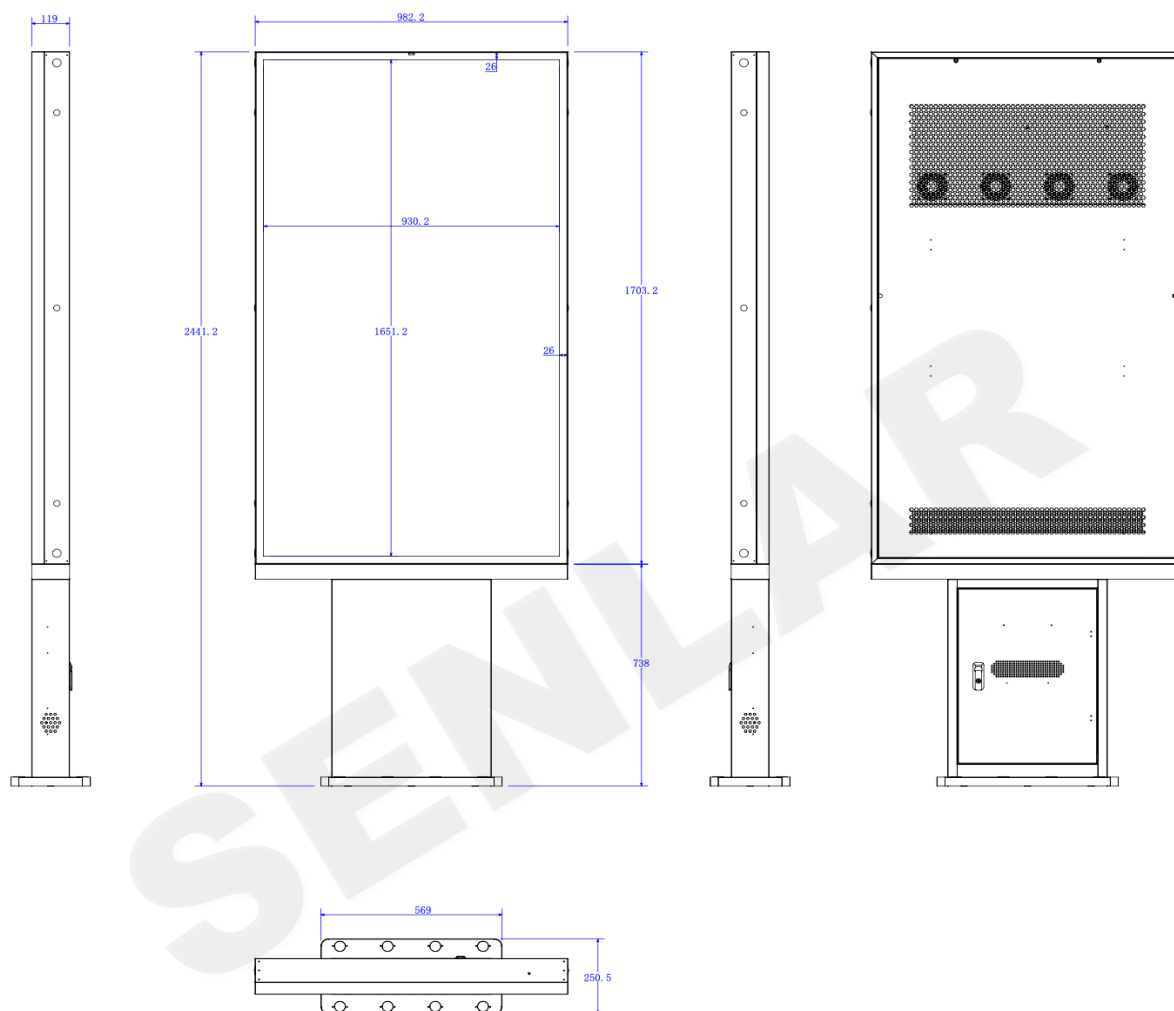

Specifications



Panel Size(inch)	32	43	49	55	65	75
Display Area(mm)	698.8*393.4	942*530.4	1075*605	1210*680.8	1429*804	1651.2*930.2
Resolution	1920*1080	1920*1080	1920*1080	1920*1080	3840*1080	3840*2160
Brightness(nits)	3000 (1000-5000 optional)					
Viewing Angle	178°(H) / 178°(V)					
Color	16.7M					
Operating System	Android 5.1.1					
Motherboard	RK3288, CPU Duad-Core 1.8GHz, GPU Quad-Core Mali-T764					
Memory	DDR3 2GB+16GB					
Network Connection	RJ45、WIFI、Bluetooth、3G/4G					
Built-in Speaker	8 Ohm/ 10 watt *2 pcs					
Life Time	50000H					
Working/Storage Temperature	'-0C° ~50C°/-20C° ~60C°					
Working/Storage Humidity	5% ~95%					
Input Voltage	100V~240V AC					
Waterproof Level	IP66					
SystemManagement Modes	Unified management, Group management, Multi-user administration, Remote management, Scheduled power on/off					
Remote OperationModes	Remote auto power on/off, Remote content update, program editing, Real-time status monitoring					
System Playback Modes	Loop, Scheduled, Interruptible playback, Multi-mode compatibility					
Power Consumption	≤120W	≤180W	≤250W	≤280W	≤380W	≤400W
Product Size/1(mm)	513*250 *1750	582.4*250.5 *1704	657*250.5 *1837	732.8*250.5 *1972	856*250.5 *2191	982.2*250.5*2 441.2
Certification	CE, FCC, RoHS, ISO9001					
Package	PE film + Foam corner protector + Carton +Wooden Frame/Box					