


SMD Module

320*160mm, Indoor LED

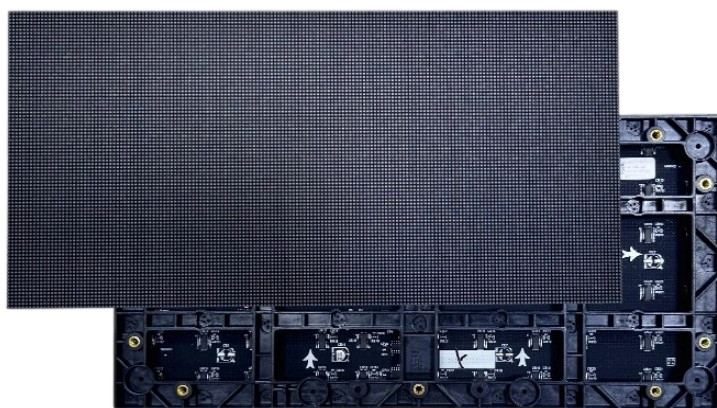

Shenzhen Senlar Vision Technology CO., Ltd.

www.senlar.com

Features:

- Competitive channel pricing;
- Mass production in the same batch ensures stable quality;
- Large inventory available with no order lead time.

Usage Precautions:

- Static Protection: When handling the LED lamp panel and display panel, take precautions against static electricity by following these protective measures:
 - Wear grounded anti-static wrist straps or anti-static gloves. Ensure that the display body is properly grounded, with the grounding resistance ≤ 10 ohms. Perform a check every six months.
- Cleaning: When cleaning the surface of the lamp panel, do not use unknown chemical liquids. Use a clean, dust-free or damp cloth with purified water for gentle wiping.
- Power Protection: The distribution box must be equipped with surge protectors and other protective devices.

Package:

- 1 Carton Packaging: 40 modules
- Packaging Dimensions: 537 mm x 382.6 mm x 397 mm.

Specifications

Pixel Pitch	1.25	1.53	1.86	2	2.5
LED Type	SMD1010	SMD1515	SMD1515	SMD1515	SMD2121
Module Resolution	256*128	208*104	172*86	160*80	128*64
Density(dots/m2)	640000	422500	288906	250000	160000
Scan Method	1/64	1/52	1/43	1/40	1/32
Module Size(mm)	320*160				
Module Weight(kg)	0.5				
Brightness (nit)	>500				
Color Temperature (K)	3000-18000K				
Viewing Angle	160°/160°				
Contrast Ratio	>10000:1				
Power Consumption(W/m²)	250-600				
Refresh Rate (Hz)	3840				
Gray Level (bit)	16				
IP Level	IP30				