


# FIC Series

1000\*250mm, Indoor LED

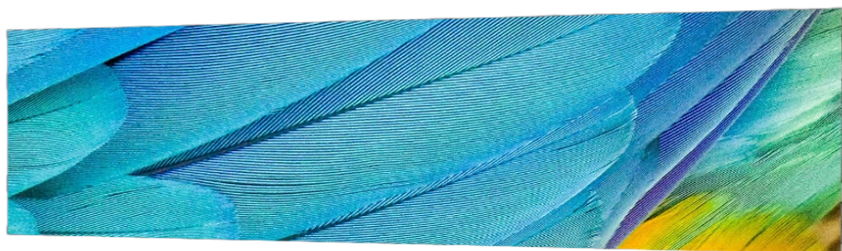

Shenzhen Senlar Vision Technology CO., Ltd.

[www.senlar.com](http://www.senlar.com)

## **Features:**

- Lightweight and ultra slim(32mm thickness)
- Various cabinet size: 1000/750/500\*250mm, 1000/750/500\*500mm
- Excellent surface flatness for seamless displays, making installation and disassembly quick and easy
- Designed for easy wall mounting, making them ideal for projects that require displays to be mounted on walls
- Able to transform to LED Poster

## **Usage Precautions:**

- Static Protection: When handling the LED lamp panel and display panel, take precautions against static electricity by following these protective measures:
  - Wear grounded anti-static wrist straps or anti-static gloves.Ensure that the display body is properly grounded, with the grounding resistance  $\leq 10$  ohms. Perform a check every six months.
- Cleaning: When cleaning the surface of the lamp panel, do not use unknown chemical liquids. Use a clean, dust-free or damp cloth with purified water for gentle wiping.
- Power Protection: The distribution box must be equipped with surge protectors and other protective devices.

## Specifications

Pixel Pitch	1.25	1.56	1.95	2.6	2.9
LED Type	SMD1010	SMD1212	SMD1515	SMD1515	SMD1515
Module Resolution	200*200	160*160	128*128	96*96	84*84
Density(dots/m2)	640000	409600	262144	147456	112896
Scan Method	1/50	1/40	1/32	1/32	1/28
Module Size(mm)	250*250				
Cabinet Size(mm)	1000/750/500*250/500*32mm				
Brightness (nit)	600-800				
Color Temperature (K)	3000-18000K				
Viewing Angle	160°/160°				
Contrast Ratio	>10000:1				
Power Consumption(W/m²)	200-500				
Refresh Rate (Hz)	3840				
Gray Level (bit)	16				
Input Voltage	100-240V, 50-60Hz				
Working temperature/humidity	-20~60C°/10%~85%				
Storage temperature/humidity	-20~60C°/10%~85%				
IP Level	IP30				