


# FIV Series

600\*337.5mm, Indoor LED

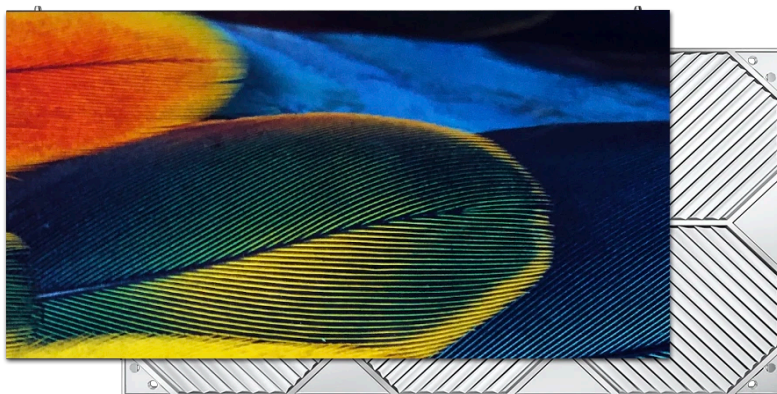

Shenzhen Senlar Vision Technology CO., Ltd.

[www.senlar.com](http://www.senlar.com)

## **Features:**

- 16:9 aspect ratio for easy setting up screen and pixel-to-pixel screen quality.
- Supports dual backup of power&signal.
- Cable-less design minimizes clutter, ensuring a cleaner setup.
- Excellent surface flatness for seamless displays, making installation and disassembly quick and easy.
- Designed for easy wall mounting, making them ideal for projects that require displays to be mounted on walls.

## **Usage Precautions:**

- Static Protection: When handling the LED lamp panel and display panel, take precautions against static electricity by following these protective measures:
  - Wear grounded anti-static wrist straps or anti-static gloves.Ensure that the display body is properly grounded, with the grounding resistance  $\leq 10$  ohms. Perform a check every six months.
- Cleaning: When cleaning the surface of the lamp panel, do not use unknown chemical liquids. Use a clean, dust-free or damp cloth with purified water for gentle wiping.
- Power Protection: The distribution box must be equipped with surge protectors and other protective devices.

## Specifications

Pixel Pitch	0.93	1.25	1.56	1.87
LED Type	MiniLED	SMD1010	SMD1212	SMD1515
Module Resolution	320*180	240*135	192*108	160*90
Cabinet Resolution	640*360	480*270	384*216	320*180
Density(dots/m2)	1137778	640000	409600	285204
Scan Method	1/60	1/60	1/64	1/45
Module Size(mm)	300*168.75			
Cabinet Size(mm)	600*337.5*52			
Cabinet Weight(kg)	6.9			
Brightness (nit)	500-800			
Color Temperature (K)	3000-18000K			
Viewing Angle	160°/160°			
Contrast Ratio	5000:01:00			
Power Consumption(W/m <sup>2</sup> )	250-500			
Refresh Rate (Hz)	3840			
Gray Level (bit)	16			
IP Level	IP30			