

HWLD Series

Double-Sided Window Display, Indoor LCD



Shenzhen Senlar Vision Technology CO., Ltd.

www.senlar.com

Features:


- Ultra-Slim & Lightweight Design: Only 2.5cm thick for effortless installation and modern aesthetics.
- Premium Material Construction: Combines aviation-grade aluminum with cold-rolled steel featuring a baked-paint finish, exuding premium quality.
- Dual-Sided Display: Operates in synchronous or asynchronous modes, reaching broader audiences.
- Superior Picture Quality: High-definition clarity with exceptional brightness, contrast, and color saturation.
- Robust Scheduling: Automated power on/off eliminates manual oversight. Remotely disable the inner screen individually as needed.
- Split-Screen Multi-Template Support: Display multiple formats simultaneously on a single screen.
- Hierarchical Access Controls: Manage information publishing permissions by user level.
- Effortless Content Updates: Upload and refresh playlists via USB or network – quick and convenient.

Usage Precautions:


- Avoid direct sunlight exposure and keep the display away from heat sources.
- Prevent contact with oil/grease to avoid plastic component degradation.
- Ensure adequate ventilation around the display.
- UV filter mandatory for outdoor operation.
- Clear ventilation openings of obstructions to maintain thermal dissipation efficiency.
- Never block chassis vents
- After disconnecting power, wait 6 seconds before reconnecting.
- Lift the display by its frame; never apply pressure to the screen. Avoid direct contact with the panel surface.
- Unplug during extended inactivity.

Dimension:


43inch

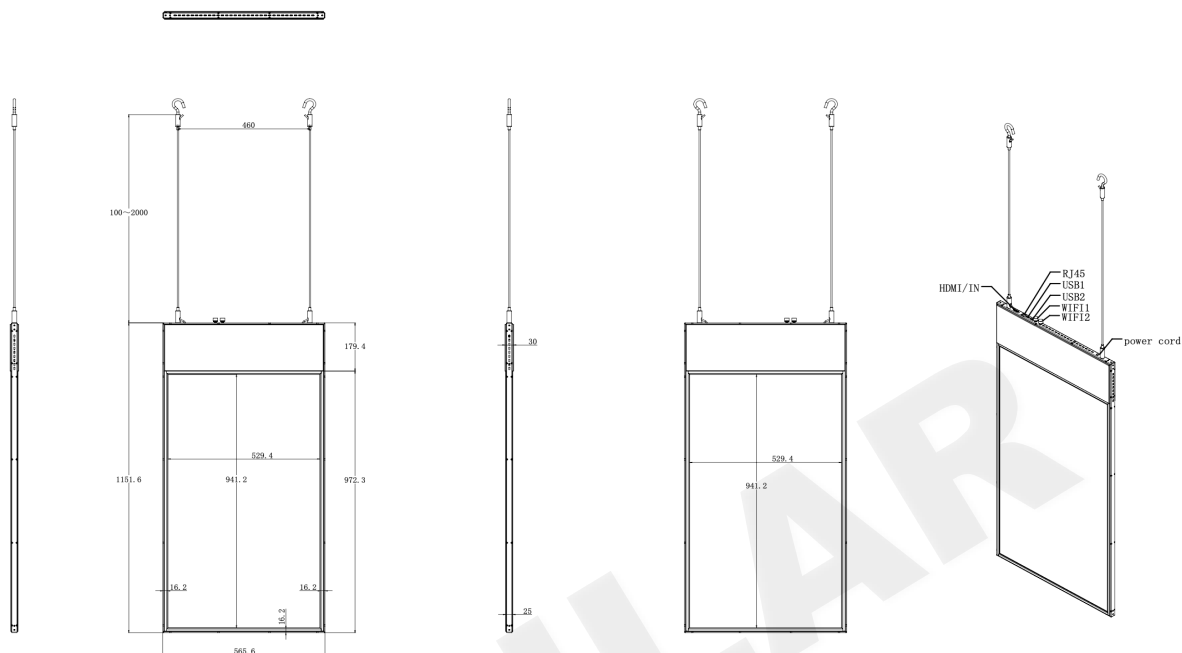

49inch

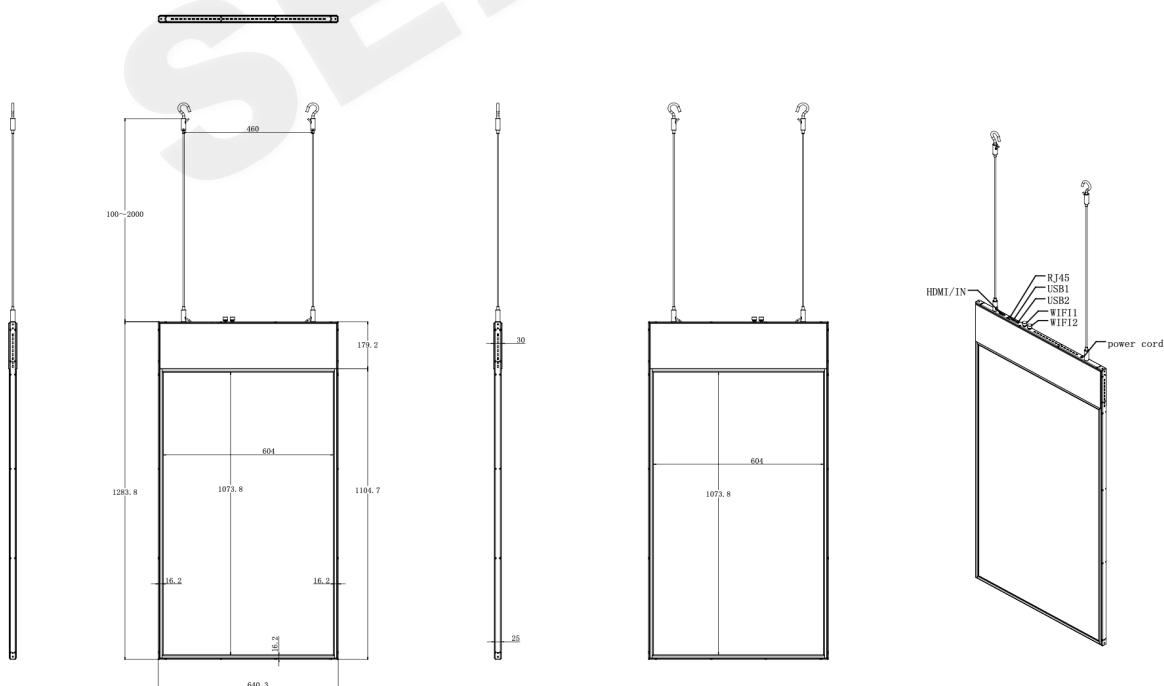

55inch

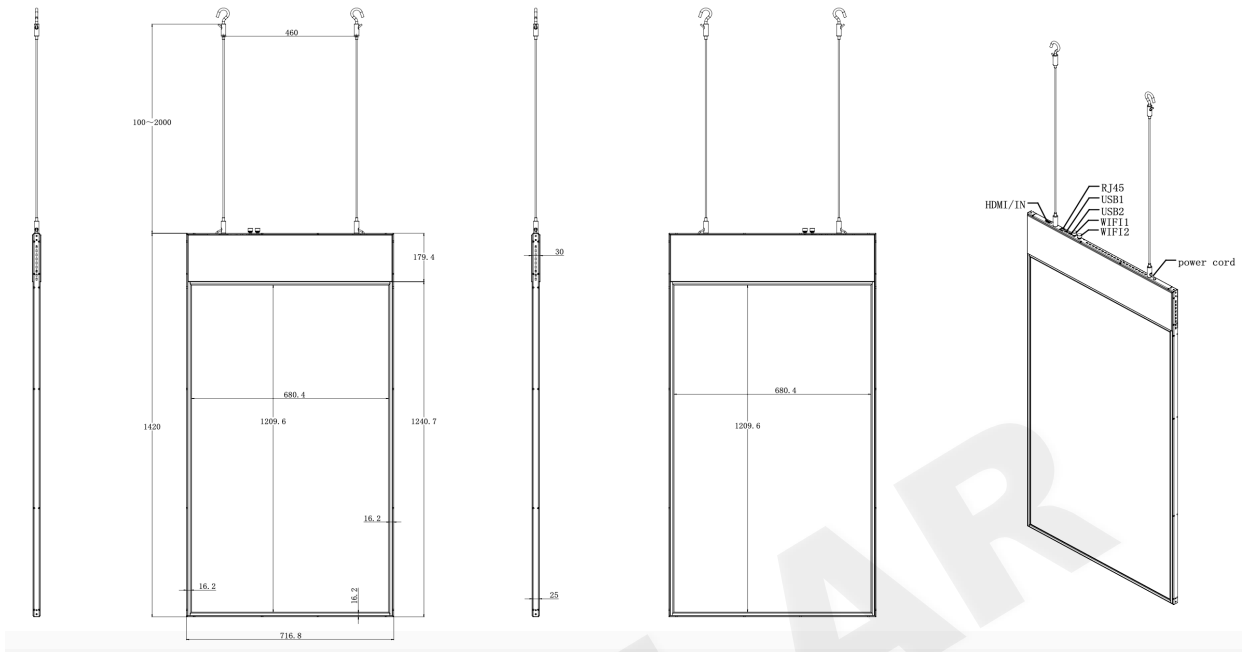

Specifications

Panel Size(inch)	43	49	55
Display Area(mm)	941.2*529.4	1073.8*604	1209.6*680.4
Resolution	1920*1080	1920*1080	3840*2160
Brightness(nits)	700+ 700		
Viewing Angle	178°(H) / 178°(V)		
Color	16.7M		
Operating System	Android 11		
Motherboard	RK3568, CPU Quad-Core 2.0GHz, GPU ARM G52 2EE		
Memory	DDR3 2GB+16GB		
Network Connection	RJ45、WIFI、Bluetooth、3G/4G		
Built-in Speaker	2		
Life Time	50000H		
Working/Storage Temperature	‘-0C° ~50C°/-20C° ~60C°		
Working/Storage Humidity	5% ~90%		
Input Voltage	100V~240V AC		
System Management Modes	Unified management, Group management, Multi-user administration, Remote management, Scheduled power on/off		
Remote Operation Modes	Remote auto power on/off, Remote content update, program editing, Real-time status monitoring		
System Playback Modes	Loop, Scheduled, Interruptible playback, Multi-mode compatibility		
Power Consumption	≤145W	≤210W	≤260W
Product Size(mm)	1151.6*565.6*25	1283.8*640.3*25	1420*716.8*25
Certification	CE, FCC, RoHS, ISO9001		
Package	PE film + Foam corner protector + Carton +Wooden Frame/Box		