

THIF Series

Floor-Standing/Hanging Transparent LED, Indoor LED





Shenzhen Senlar Vision Technology CO., Ltd.

www.senlar.com

Features:

- 80% permeability
- Ultra-thin, 2mm thickness
- light weight, fast and easy installation
- Maximum brightness up to 3000nits
- Supports brightness customization



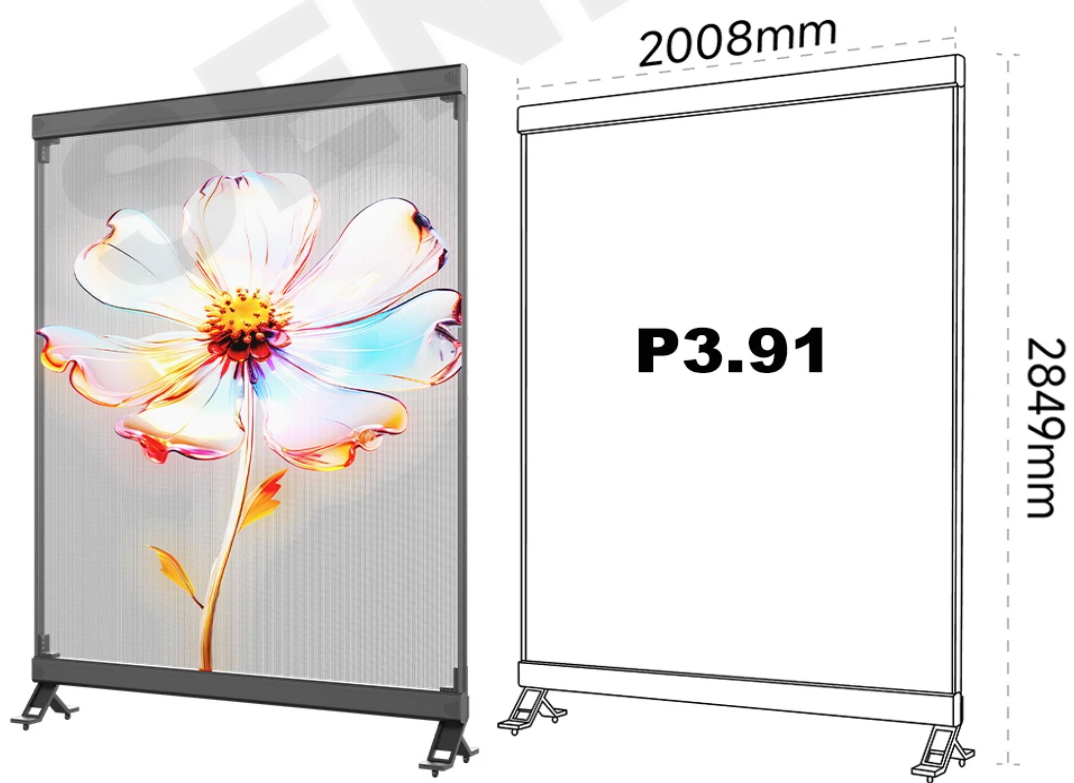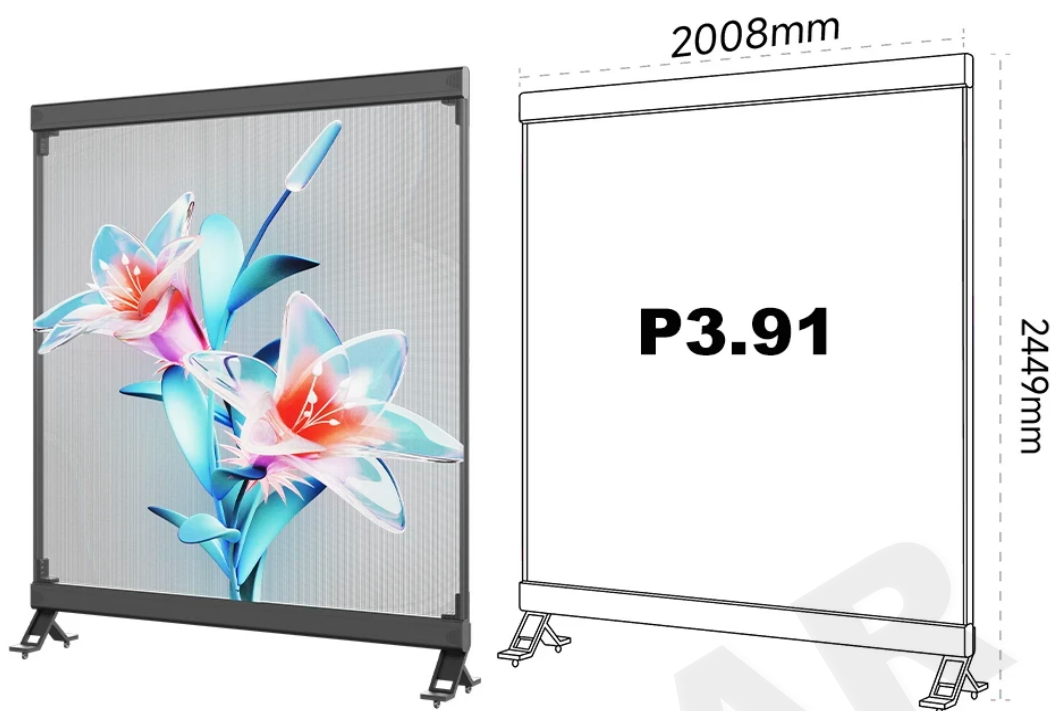

Specifications

Pixel Pitch	3.91		
Density(dots/m2)	65536		
Standard Size	1008*382*2449	2008*382*2449	2008*382*2849
Screen Visual Permeability	80%		
Brightness (nit) (customizable)	≥ 3000		
Average Power Consumption(W/m ²)	370		
Viewing Angle	140°/140°		
Maximum Contrast	4000:1		
Color Temperature (K)	2000K-9500K (adjustable)		
Protection Grade	IP20		
Frame Change Frequency	≥ 60 Hz		
Refresh Rate (Hz)	≥ 3840		
Input Vltage	AC 110V~240V, 50-60Hz,		
Working Time(H)	100,000		
Working Temperature(°C)	-10~60		
Working Humidity(RH)	10%-90%(No Condensation)		
Control Method	synchronous box (computer), asynchronous box (mobile phone APP) , USB		
Installation Method	Floor-Standing, Hanging		